


HANDRAIL SYSTEM

TYPICAL LAYOUT

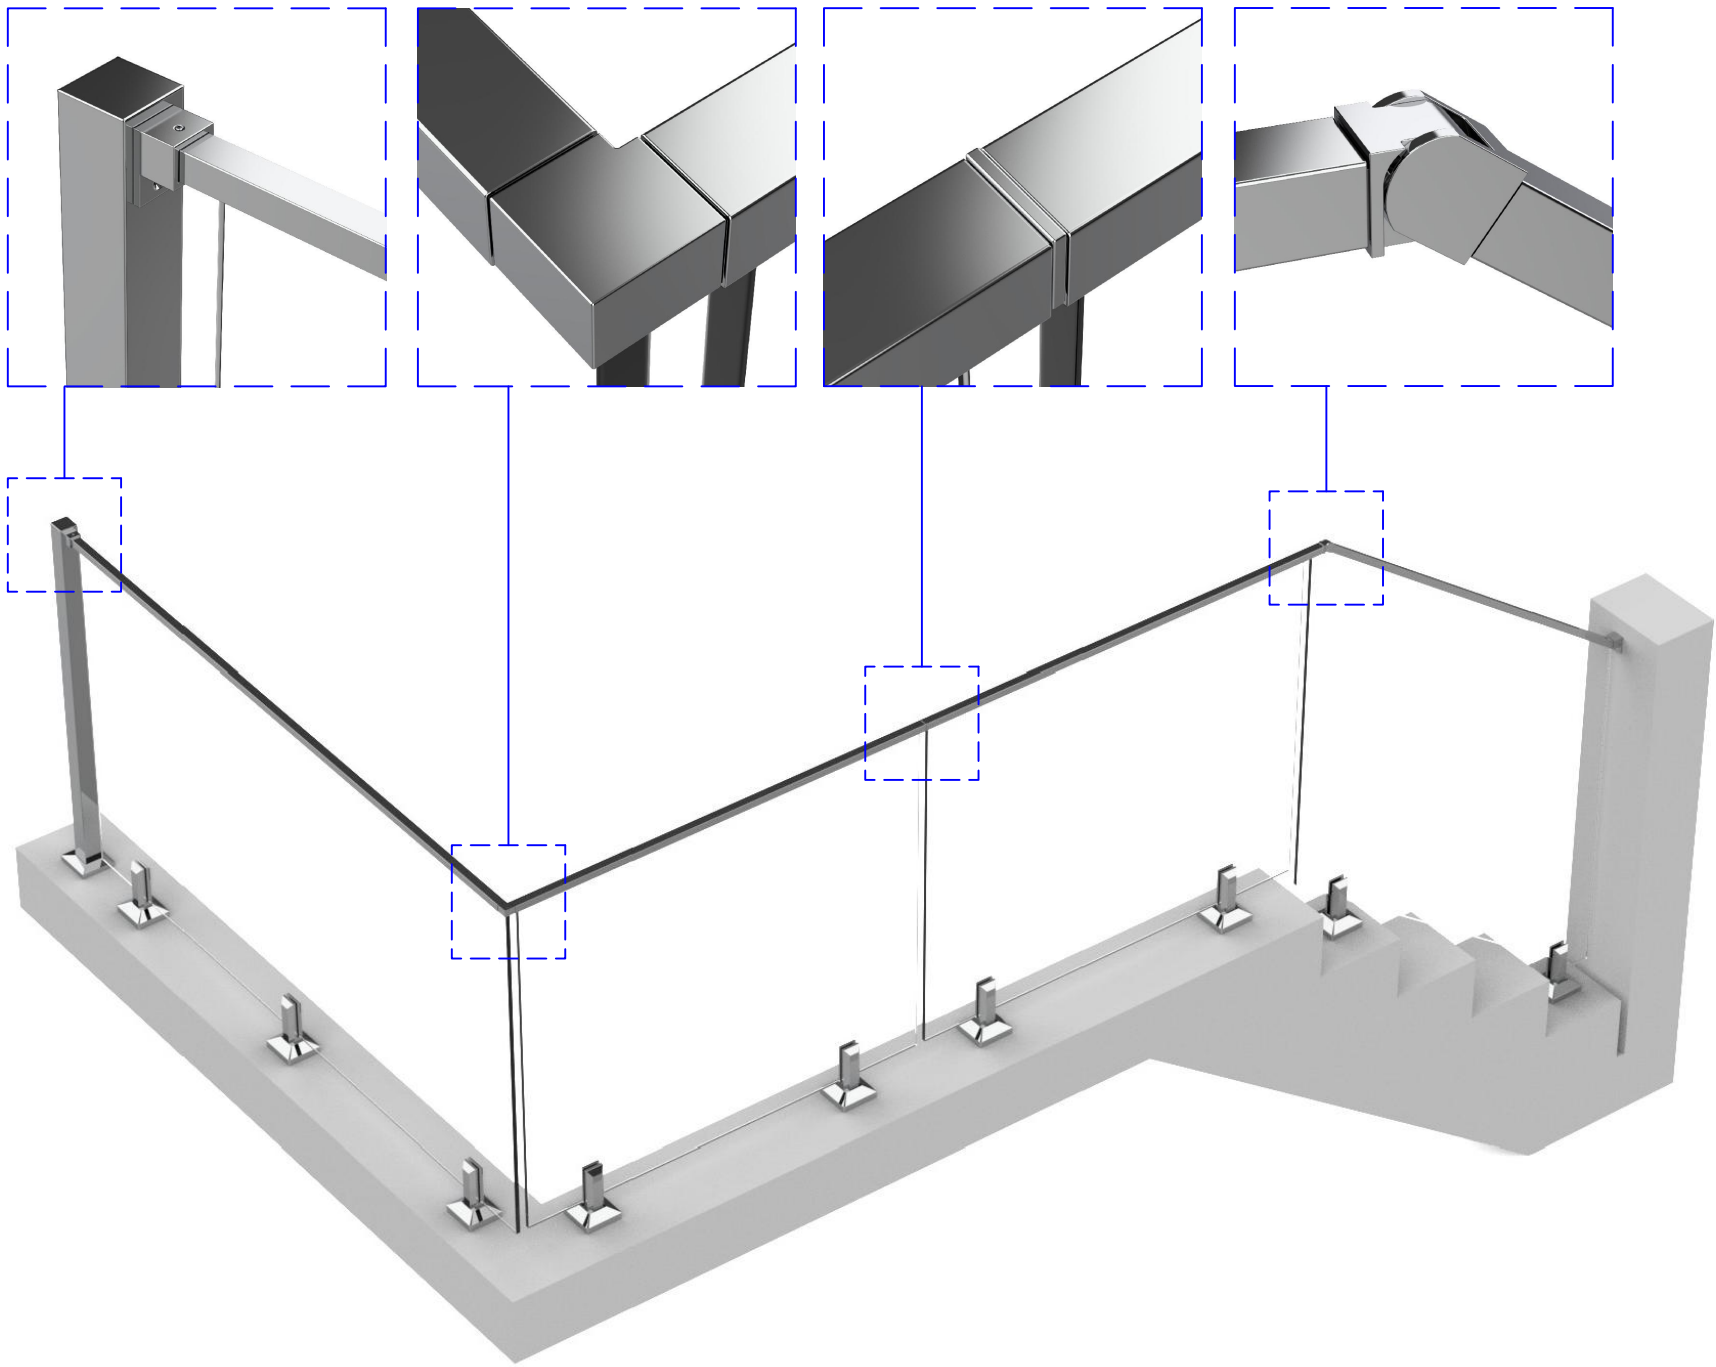

Important:

Before you install your project, please read this installation guide carefully, consider the gap between each part,calculate the exact length before cutting.

The corners and edges of toughened glass are its weakest points, so ensure they are well-protected during installation.

Always use rubber spacers to separate stainless steel hardware from the glass to avoid damage.

After completing the installation, it is essential to clean both the glass and the hardware. Proper cleaning of the glass helps maintain its protective coating, and cleaning the hardware removes any metal debris from the installation process, preventing potential rust.

Additionally, regular cleaning afterward is recommended to ensure long-term durability and maintain optimal performance.

- 1. At the both ends of the handrail, connect it to the wall or SQ50 Post by using a wall flange.
- 2. The connector can be attached using three methods:  
welding;  
mechanical screw connection;  
adhesive bonding.

WIDE RANGE OF CONNECTORS



For more detailed information, please contact the team: email [sales@grandglass.co.nz](mailto:sales@grandglass.co.nz) ph 09 478 9778 or 027 755 7705 [www.grandglass.co.nz](http://www.grandglass.co.nz)